


ateljé Lyktan



**EAGLE**

Design by Tham & Videgård



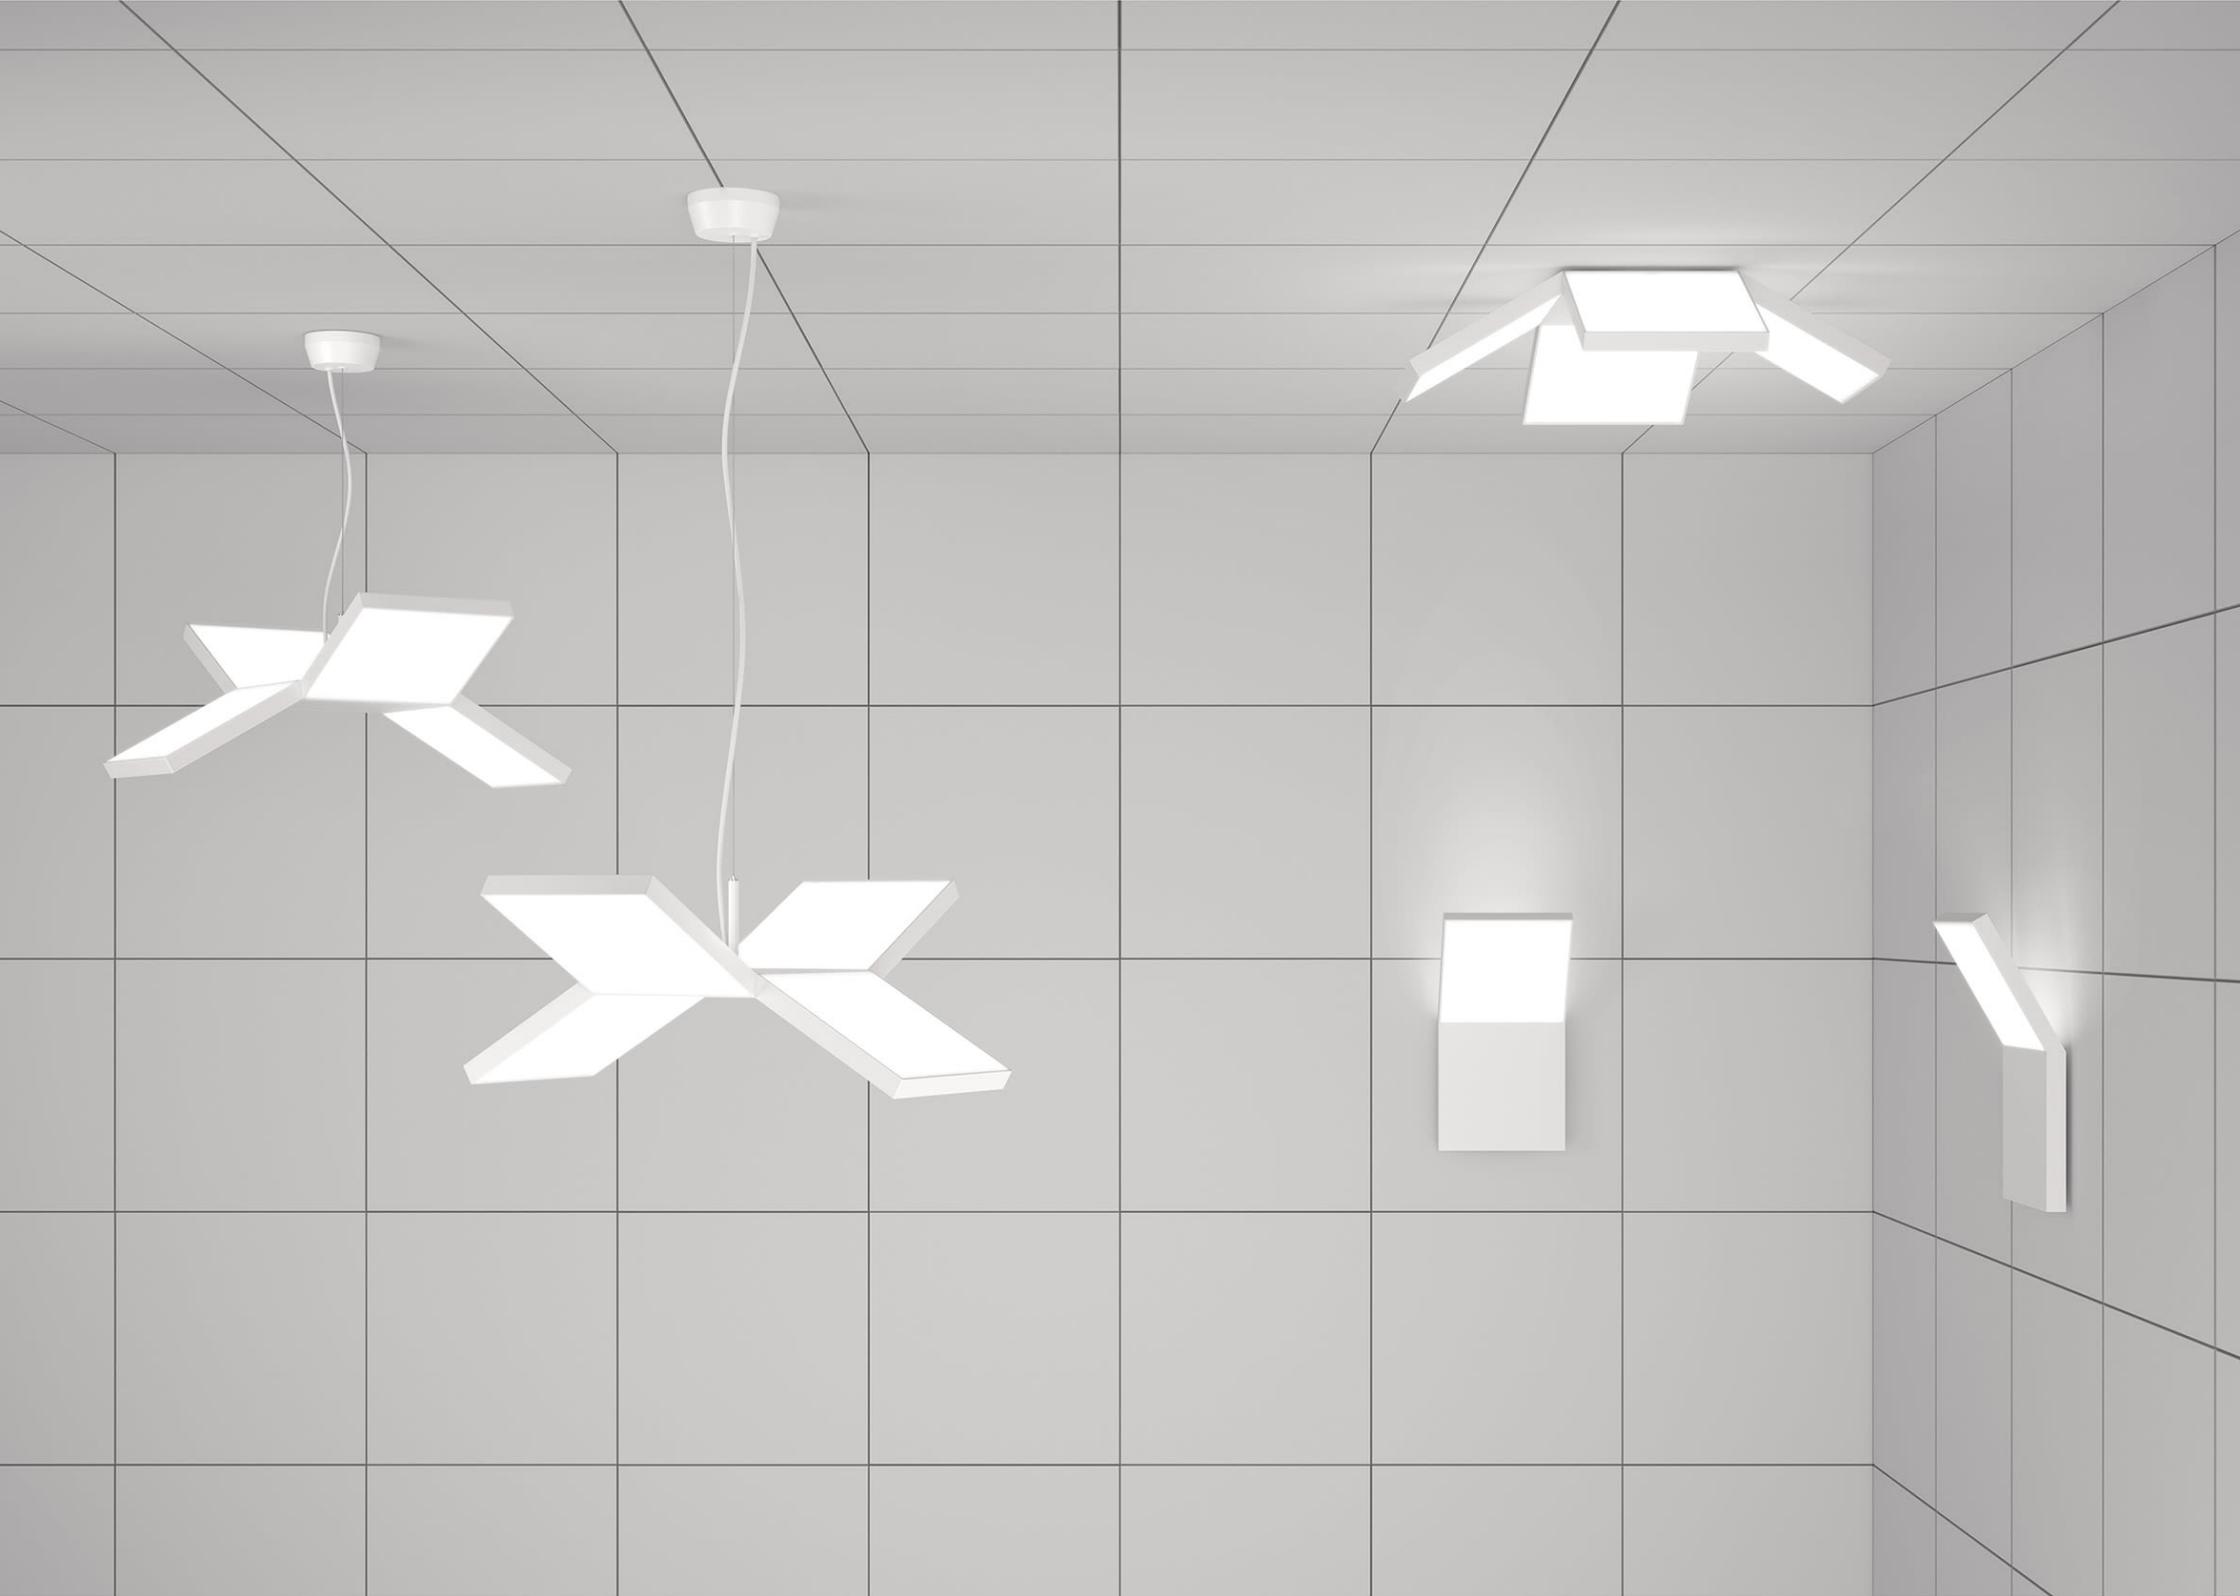




● **Black**  
RAL 9005



○ **White**  
NCS S 0300-N G10

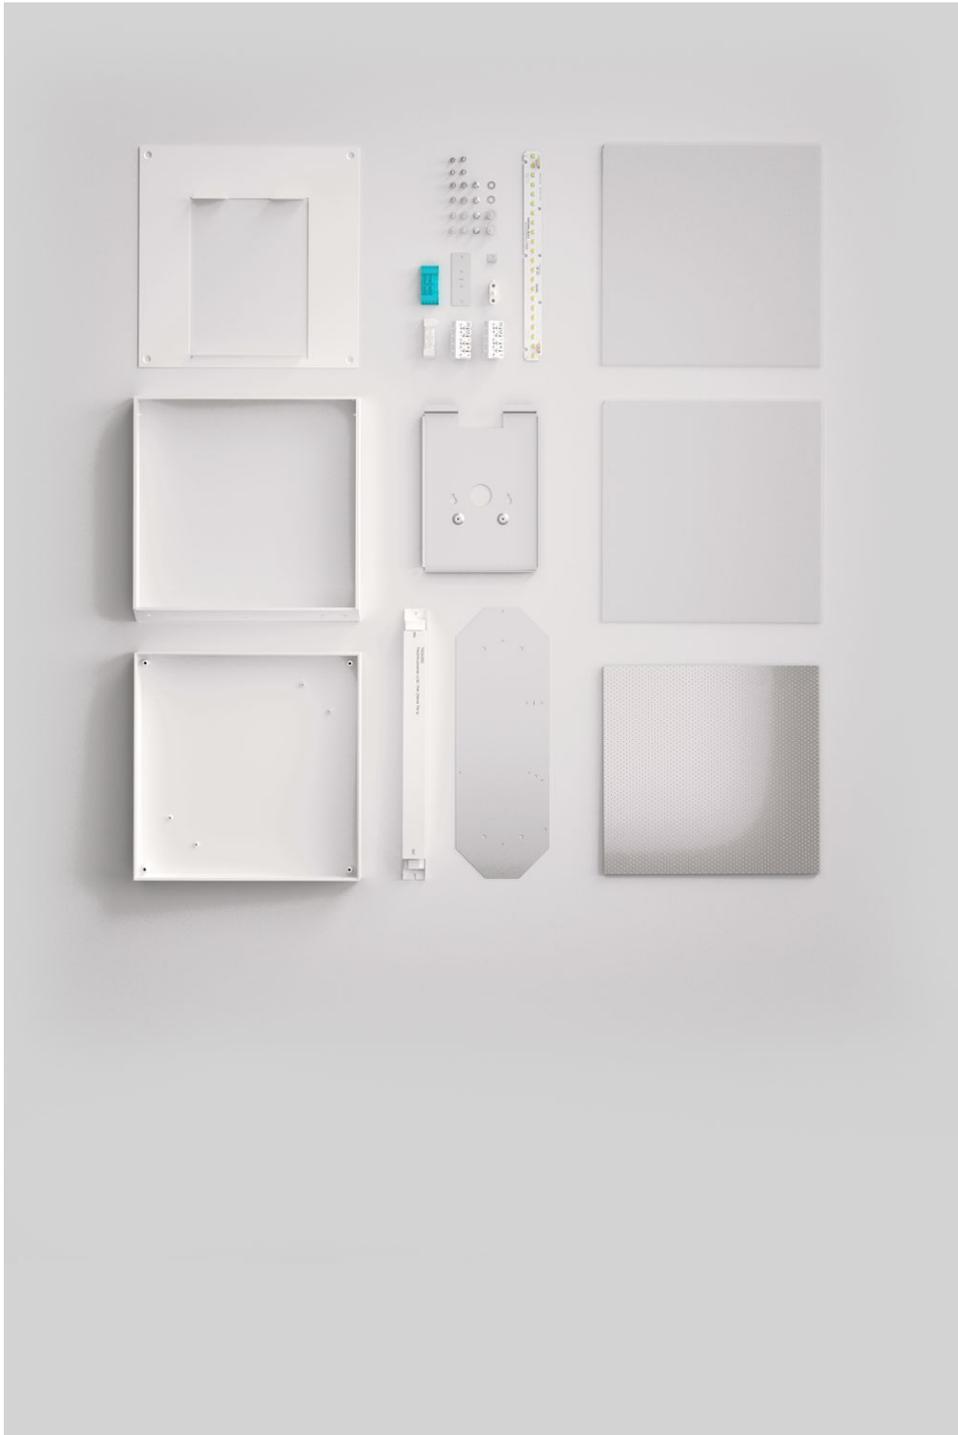

## Technical specifications

<b>Installation</b>	Delivered in 5 parts for mounting with allen key. Suspended in 3m wire. 3m white textile cable. Tube pendant on request.
<b>Material</b>	Luminaire housing in die cast aluminium. Light opening in opal acrylic
<b>Connection</b>	Fixed installation. Snap-in terminal block 5x2.5 mm <sup>2</sup> .
<b>Light source</b>	LED light source included, colour temperature 3000K or 4000K. Colour rendering CRI min. 90
<b>Driver</b>	Equipped as standard with DSI/DALI driver with dimming 1-100%. Set value is retained after power failure. SwitchDim and CorridorFunction possible. 1 ballast / DALI address per luminaire.
<b>Energy classification</b>	This product contains a light source with energy efficiency class E to regulation (EU) No 2019/2015



# ateljé Lyktan

Head Office

Fyrvaktaregatan 7, SE-296 81 Åhus, Sweden

Tel: +46 (0)44 28 98 10

E-mail: [info@ateljelyktan.se](mailto:info@ateljelyktan.se)

[www.ateljelyktan.se](http://www.ateljelyktan.se)