


ateljé Lyktan

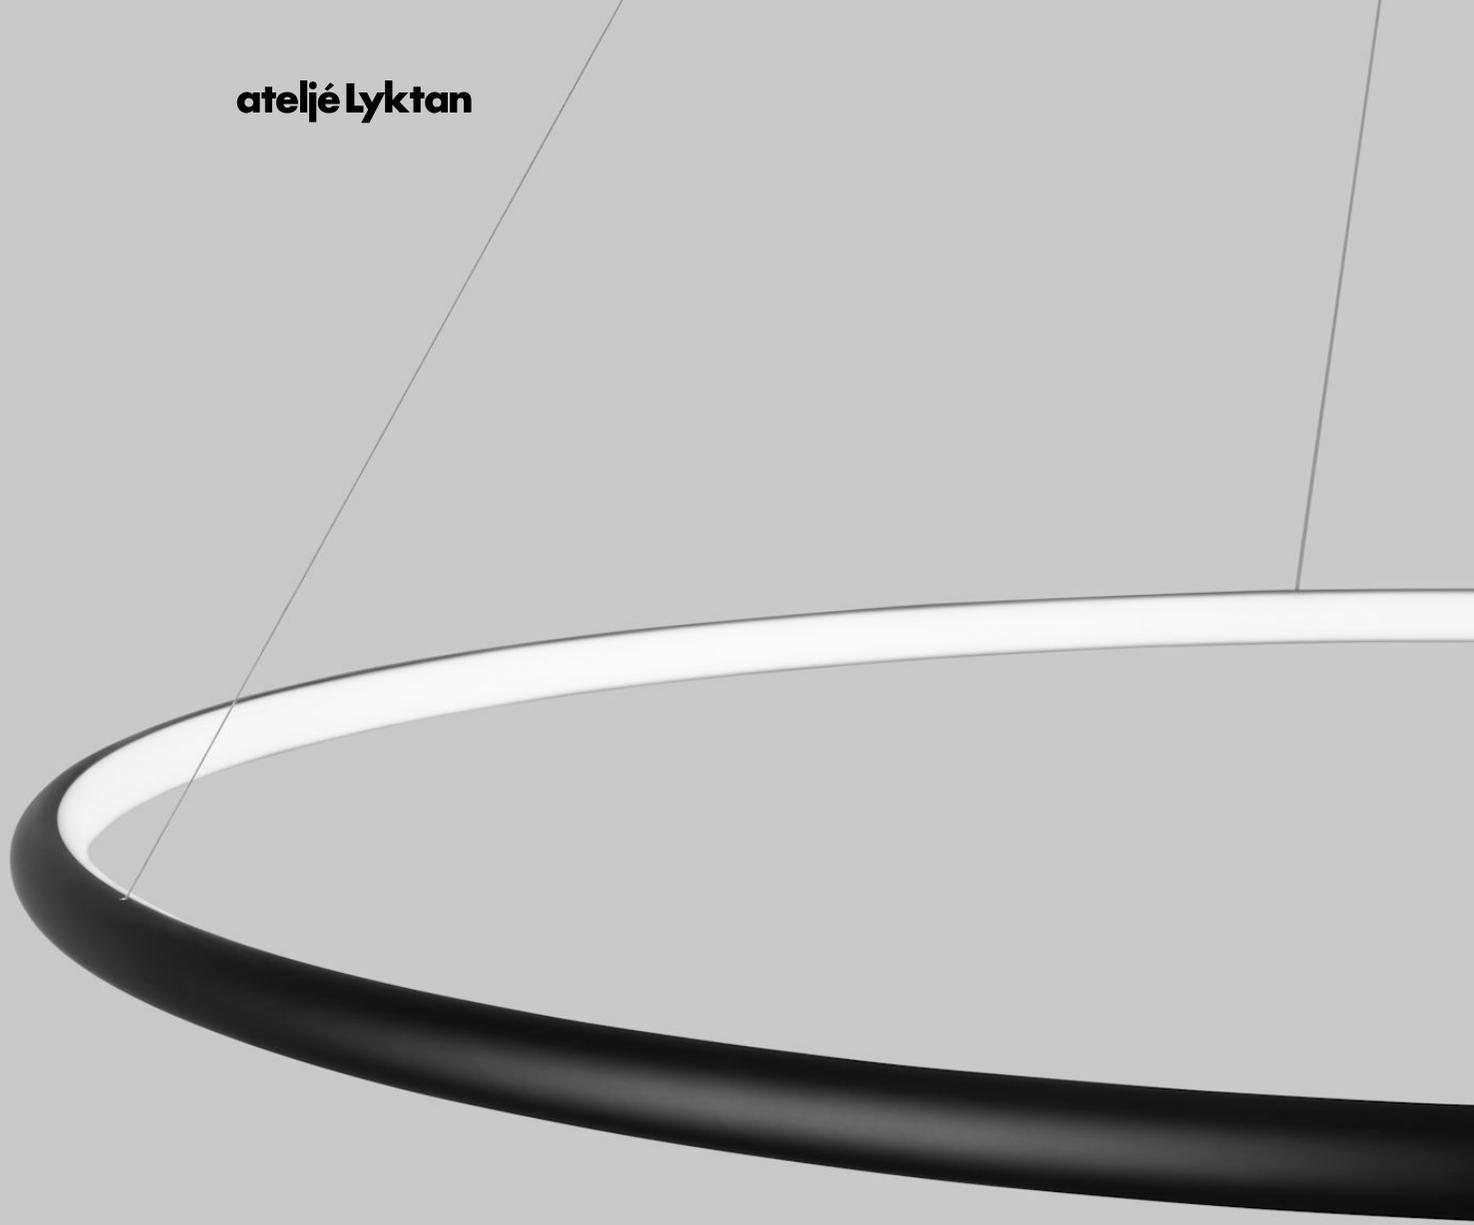

ECLIPSE

Design by ateljé Lyktan by LED Linear

A ring of light

An eclipse is an astronomical event where light and obscurity meet poetically to form a ring of light. LED Linear intended to capture and transcribe the beauty of this magnificent physical phenomenon into a luminaire, and so Eclipse arose.







Black
RAL 9005



Silver

Technical specifications

Material	Profile in aluminium. Diffuser i PMMA.
Installation	Suspended in 2 m steel wire that allows vertical adjustment. Supplied with mounting kit for recessed or surface mounted installation. Recessed installation is possible for ceilings with ceiling thickness up to 30 mm. The ceiling cup is white as standard.
Connection	Excluding connection cable to the primary side. The secondary side comes with transparent cable.
Diffuser	Opal diffuser.
Light source	Including LED light source from LED Linear, colour temperature 2700K, 3000K or 4000K. Colour rendering index CRI80. Lifespan: L80B10 60 000h.
Energy classification	This product contains a light source of following energy efficiency class to regulation (EU) No 2019/2015 Eclipse 800 Light source with CRI and CT 827/830, system power 38W - Class D Light source with CRI and CT 827/830, system power 63W - Class E Light source with CRI and CT 840, system power 38W - 63W - Class D Eclipse 1200 Light source with CRI and CT 827/830/840 - Class D
Driver	DSI/DALI driver with dimming 1-100%. SwitchDim and CorridorFunction possible. Lifespan: 50 000 hrs.

ateljé Lyktan

Head Office

Fyrvaktaregatan 7, SE-296 81 Åhus, Sweden

Tel: +46 (0)44 28 98 10

E-mail: info@ateljelyktan.se

www.ateljelyktan.se