


ateljé Lyktan

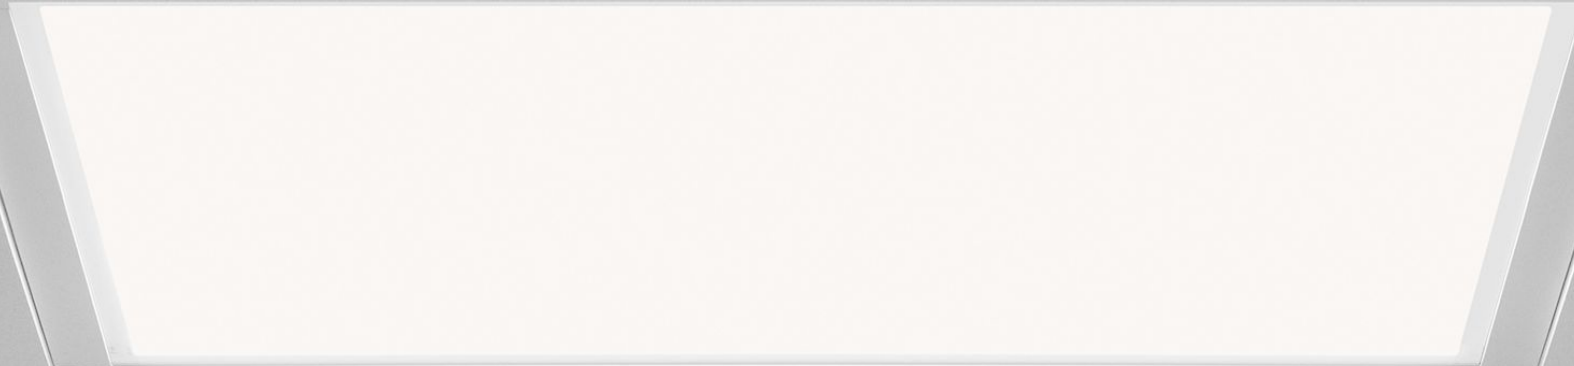


LEVEL MICROPRISM

Design by Olle Lundberg



Level – discreet power from above

Level is a minimalist luminaire that integrates seamlessly into suspended ceilings – or can be wire-suspended or surface-mounted with optional accessories.

Its microprismatic light opening delivers efficient, glare-free general lighting with excellent color rendering. Designed by Olle Lundberg and made for modern workspaces.

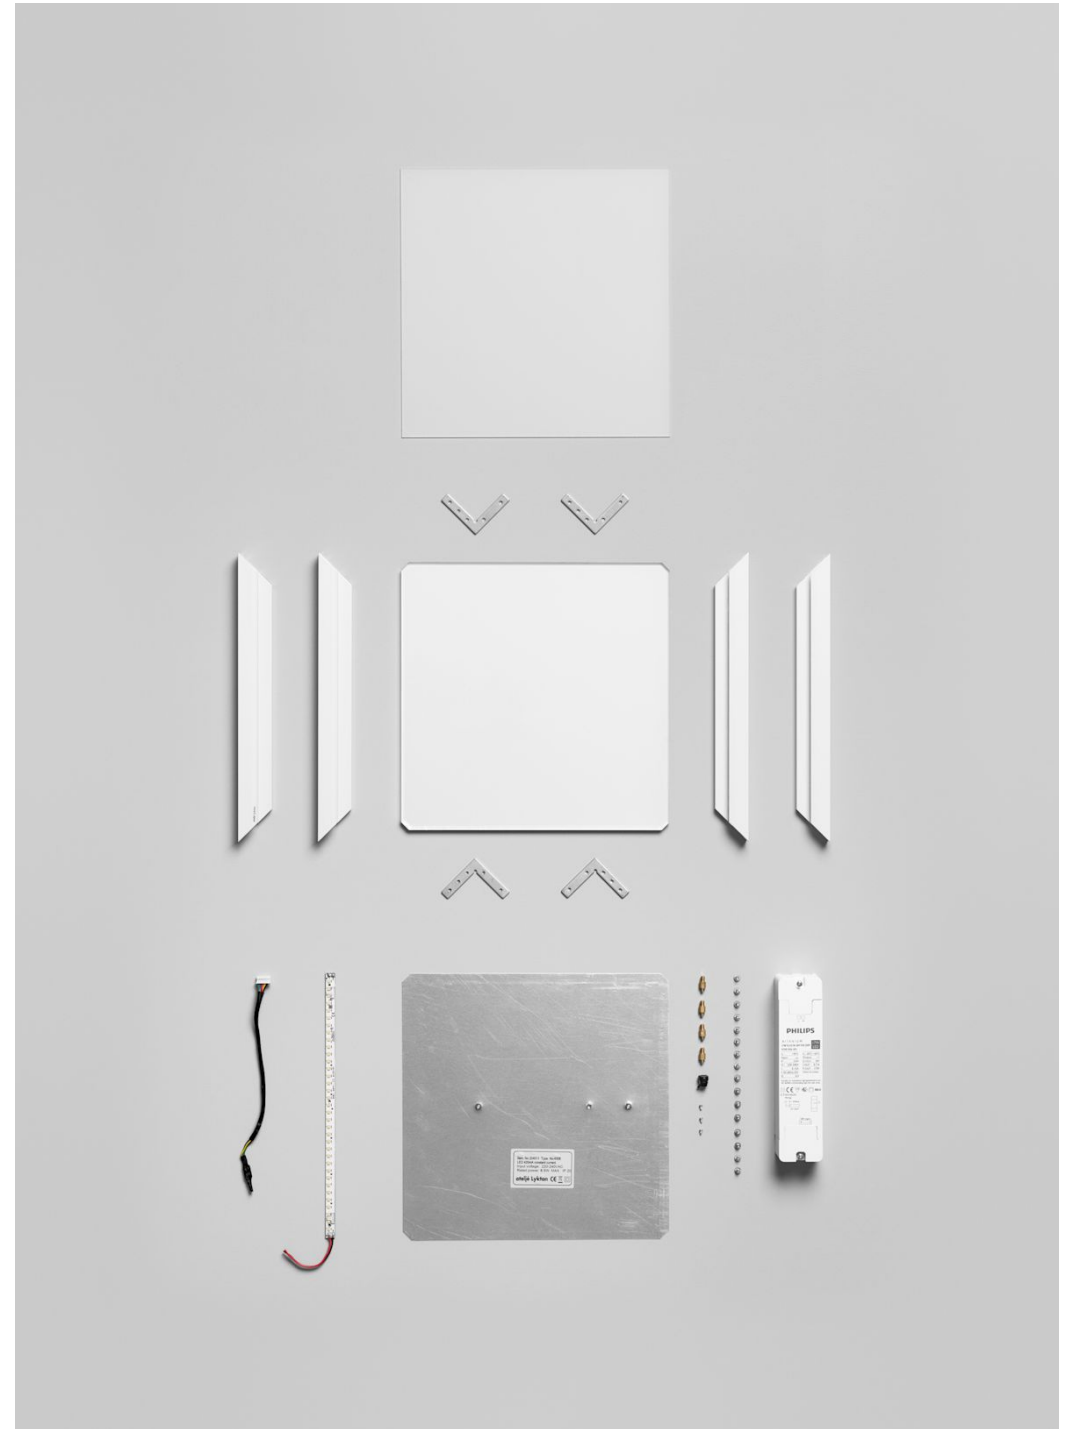



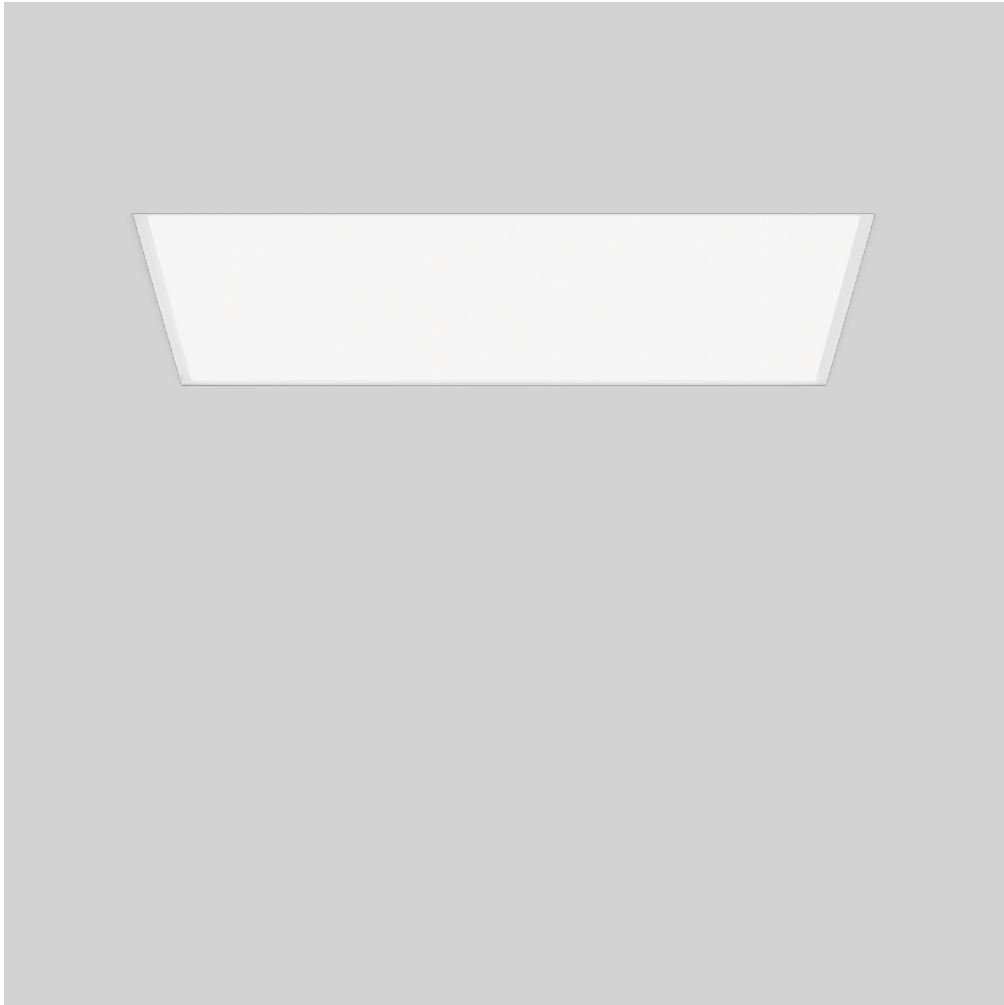

White
RAL 9016



Technical specifications

Installation	Mounted directly in ceiling suspension system. Can also be assembled in fixed ceilings with a surface mounted box or to be suspended with 4 wires (accessory). Plate for circular light opening is also sold as an accessory.
Light source	LED light source included. Colour temperature: 3000K or 4000K. Colour rendering: CRI min. 90. Estimated lifetime according to LM80: L90 >54000h. Estimated lifetime according to TM-21: L90 - 100 000h
Other	IP40. Not for outdoor use. Please note that luminaire thickness is 8mm without driver. If needed, the driver can be placed next to the luminaire instead.
Material	Luminaire housing in white lacquered aluminium. Light opening in microprismatic acrylic glass.
Diffuser	Microprismatic acrylic glass.
Light scattering	Symmetrical downlight 90°
Driver	Equipped with latest generation LED driver. Regulates the light with amplitude modulation creating a flicker-free light. Dimming 1-100%. Lifetime: 100 000h (max 10% loss)
IK class	07.
Weight	3,8 kg
Connection	Halogen free cable with free wire ends or quick connector. Driver to be placed above the suspended ceiling. The driver can be fixed on the back of the luminaire with pre-mounted tape.
Energy classification	This product contains a light source with energy efficiency class E to regulation (EU) No 2019/2015



ateljé Lyktan

Head Office

Fyrvaktaregatan 7, SE-296 81 Åhus, Sweden

Tel: +46 (0)44 28 98 10

E-mail: info@ateljelyktan.se

www.ateljelyktan.se