

ateljé Lyktan



RIFF PUCK

Design by Olle Lundberg

Create different design expressions

When Olle Lundberg designed the luminaire Riff, he wanted to create a flexible and versatile luminaire, which could easily be adapted to different environments.

The common component of Riff is the so-called light engine, made of die cast metal for good thermal management, and with a LED module and LED protector included, reflecting high quality material in meticulous detail. Diffusers are also included for an even spread of light.







Black

RAL 9005 fine texture




White

RAL 9016 fine texture



Technical specifications

Material	Light engine and shade in die cast metal.
Installation	Suspended in 2 m textile cable, black or white. Electronic driver is mounted in the supplied ceiling cup. Supplied with CableCup ceiling cup in flexible silicone.
Light source	LED light source included, colour temperature 2700K, 3000K or 4000K. Colour rendering CRI 90. Rated lifetime: L70 60 000h.
Energy classification	This product contains a light source with energy efficiency class E to regulation (EU) No 2019/2015
Other	Light engine and shade, also named as app, creates a complete luminaire. They can be ordered separately, see accessories.
Connection	Connect directly into driver terminal block, placed in ceiling cup.
Driver	Equipped with DALI driver that regulates the light with amplitude modulation creating a flicker-free light. Dimming 1-100%. Dimming via DALI or push-button
Diffuser	Diffusing glare control in opal acrylic.
EPD	The EPD gets you a clear picture of the luminaire's total environmental impact. You can find the document under downloads, or visit the EPD official website for more information - Read the EPD

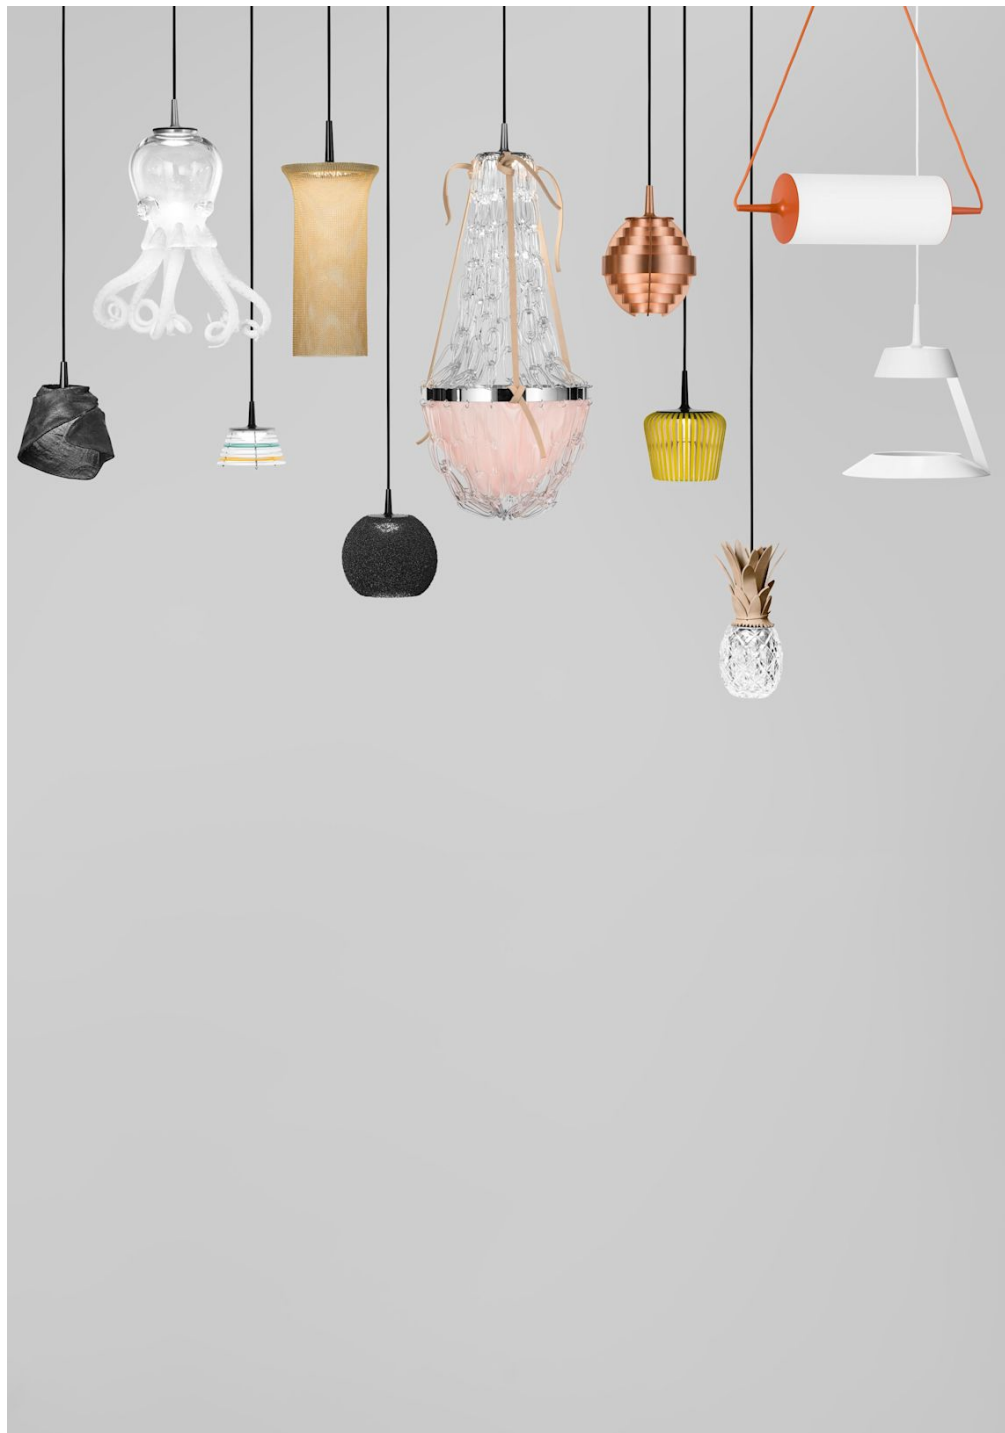

ateljé Lyktan

Head Office

Fyrvaktaregatan 7, SE-296 81 Åhus, Sweden

Tel: +46 (0)44 28 98 10

E-mail: info@ateljelyktan.se

www.ateljelyktan.se