


ateljé Lyktan

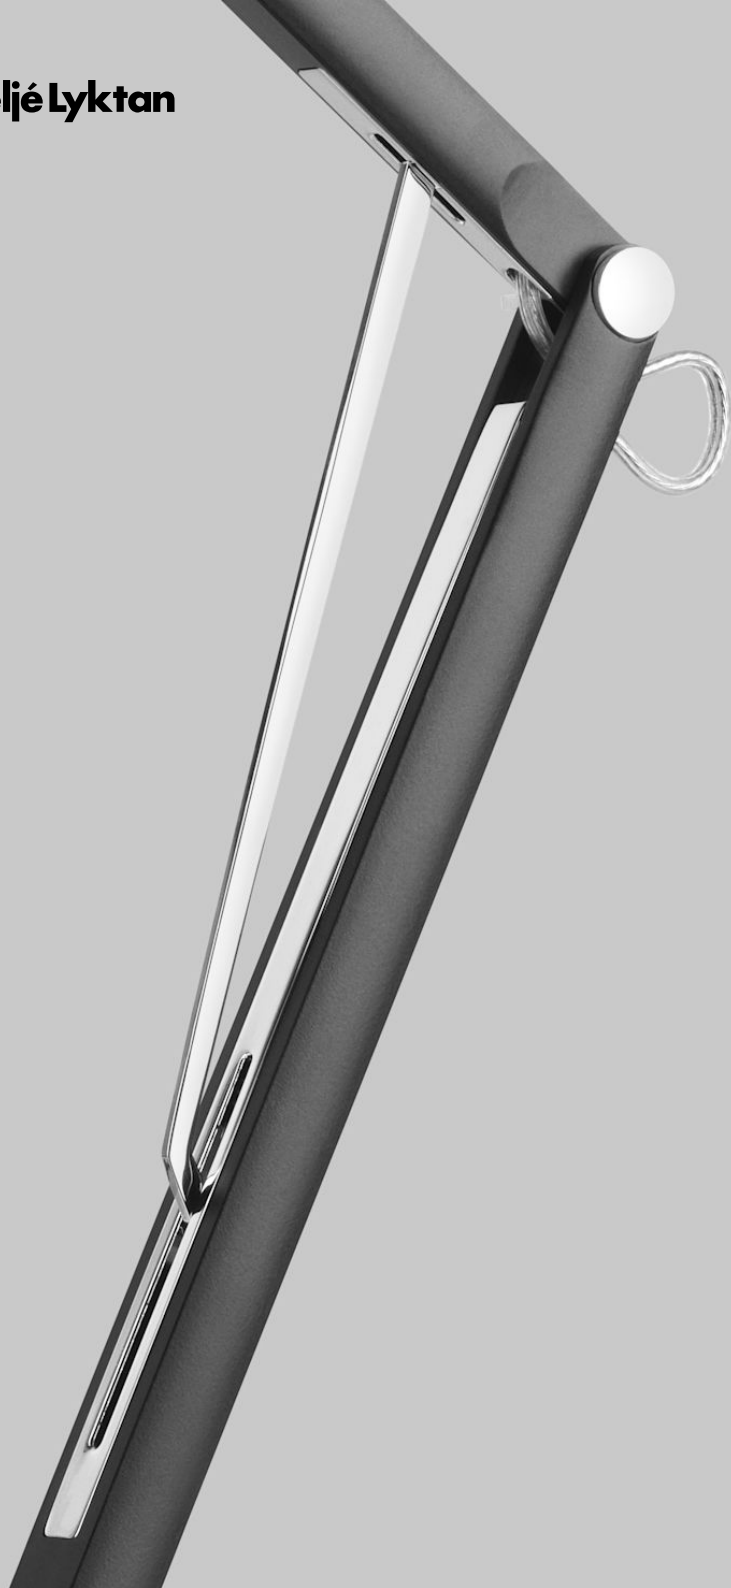

# SPARROW

Design by Olle Lundberg

## A clever desk luminaire

Sparrow, with its circular shape, differs from Birdie, which is more rectangular. The round-shaped design, in combination with the bevelled, high gloss polished edge, ties in harmoniously with the circular details on the luminaire joints.







● **Black**  
RAL 9011 G20



○ **White**  
RAL 9016 G20



## Technical specifications

<b>Material</b>	Luminaire housing in milled anodised aluminium, and top side in glass. Arm in extruded anodised aluminium. Foot plate, table clamp or grommet (accessory) in anodised and chromed steel.
<b>Installation</b>	Luminaire stand is sold as a separate article number and assembled with chosen accessories (ordered separately). Luminaire stand is assembled on a foot plate, table clamp or grommet.
<b>Connection</b>	2 m transparent halogen-free connecting leads with Plug-in driver which is connected to a socket.
<b>Diffuser</b>	Individual reflector for each individual diode.
<b>Light distribution</b>	Symmetrical distribution of light. Luminaire housing and stand are adjustable, which means that a symmetrical light pattern can be achieved.
<b>Light source</b>	Incl. LED-light source Lumileds luxeon 3020, colour temperature 3000K. Colour reproduction: CRI 90. Chromaticity tolerance: 3 SDCM. Lifespan: L70 50 000 hrs.
<b>Energy classification</b>	This product contains a light source with energy efficiency class F to regulation (EU) No 2019/2015
<b>Light regulation/control</b>	Light regulation 0-100% and on/off via touchdim on designated surface situated on the outside of the luminaire housing. Programmed light levels retained even after a power cut. Equipped with integrated presence detector (PIR) in the luminaire housing. The sensor has a detection angle of 60° and a detection distance of 2 metres. 2 hours after the last detection, the light will be switched off. A new detection switches the light on again. The sensor will be deactivated when the light is switched off manually. The luminaire meets the requirements of the international standards for interior work lighting, EN 12464-1, with an illuminance value of at least 500 lux on the work surface.
<b>Standard finish</b>	White RAL 9016 or Black RAL9011. Gloss number 20.

# ateljé Lyktan

Head Office

Fyrvaktaregatan 7, SE-296 81 Åhus, Sweden

Tel: +46 (0)44 28 98 10

E-mail: [info@ateljelyktan.se](mailto:info@ateljelyktan.se)

[www.ateljelyktan.se](http://www.ateljelyktan.se)